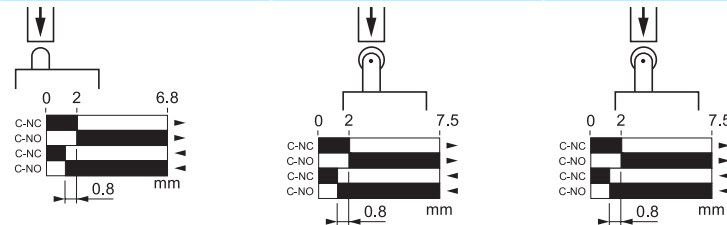
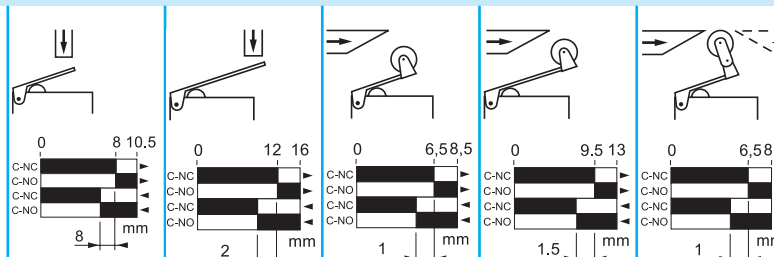


限動開關
XC 系列
輕到中度負載應用， XCJ

操作頭類型						
						
操作方式	柱塞型	滾輪柱塞型	交叉滾輪柱塞型			
型號						
接點 1 C/O (form C)		XCJ110C	XCJ102C	XCJ103C		
重量 (kg)	0.081	0.086	0.088			
操作頭類型						
						
操作方式	短手柄型	長手柄型	滾輪短手柄型	滾輪長手柄型	單向滾輪短手柄型	
型號						
接點 1 C/O (form C)		XCJ125C	XCJ126C	XCJ127C	XCJ128C	XCJ121C
Weight (kg)	0.052	0.053	0.057	0.057	0.059	
操作圖						
驅動類型						
操作圖 接觸操作 ■ 接點投入 □ 接點打開						
						
操作圖						
驅動類型						
操作圖 接觸操作 ■ 接點投入 □ 接點打開						
						

限動開關
XC 系列
輕到中度負載應用，XCJ

尺寸(mm)

XCJ110C

Front view dimensions: (1) 2 max., (2) 16.5 max. Total width 54, mounting hole spacing 25.4, center to edge 14.3. Mounting hole diameter Ø16, thread M12x1.25. Body width 23.3, total height 33.3. Flange thickness 13, flange diameter 21.4. Port diameter Ø8. Base width 25, base height 17.

Side view dimensions: Ø8, M12x1.25, 13, Ø16, 2xØ4.2, 21.4.

XCJ102C

Front view dimensions: (1) 2 max., (2) 16.5 max. Total width 54, mounting hole spacing 25.4, center to edge 14.3. Mounting hole diameter Ø16, thread M12x1.25. Body width 23.3, total height 33.3. Flange thickness 13, flange diameter 21.4. Port diameter Ø8. Base width 25, base height 17.

Side view dimensions: Ø12.5, 3.8, M12x1.25, 13, Ø16, 2xØ4.2, 21.4.

限動開關
XC 系列
輕到中度負載應用， XCJ

尺寸(mm)

XCJ125C

(1) 8.5 max.
(2) 16.5 max.
(3) 2 x Ø 4.2

XCJ127C

(1) 6.5 max.
(2) 16.5 max.
(3) 2 x Ø 4.2

XCJ121C

(1) 90° max.
(2) 16.5 max.
(3) 2 x Ø 4.2

XCJ126C

(1) 13.5 max.
(2) 16.5 max.
(3) 2 x Ø 4.2

XCJ128C

(1) 11 max.
(2) 16.5 max.
(3) 2 x Ø 4.2

XCJ129C

(1) 90° max.
(2) 16.5 max.
(3) 2 x Ø 4.2


限動開關 XCE 和 XCJ 系列 Easyline


產品目錄




Simply easy!™

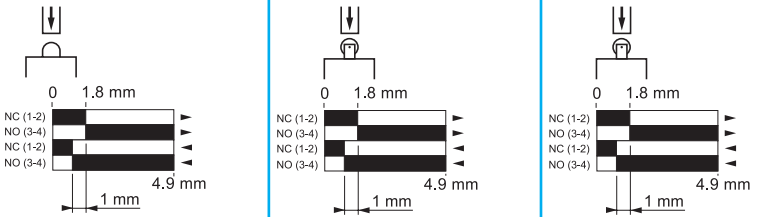
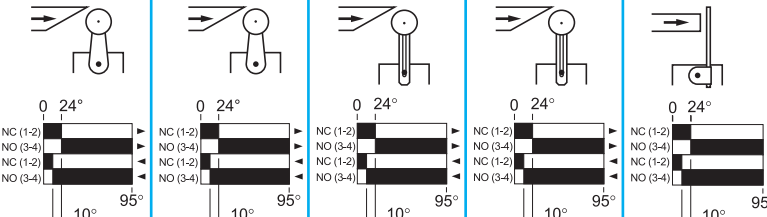
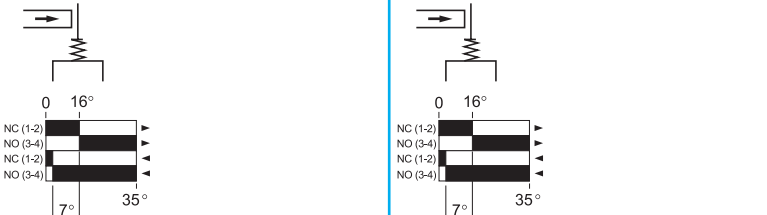
限動開關
XC 系列
輕到中度負載應用， XCE

操作頭類型				
				
操作方式	柱塞型	滾輪柱塞型	垂直柱塞型	
型號 1 NO + 1 NC (form Za)		XCE110C	XCE102C	XCE103C
重量 (kg)		0.110	0.126	0.126

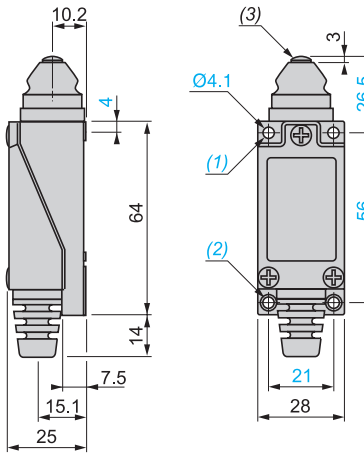
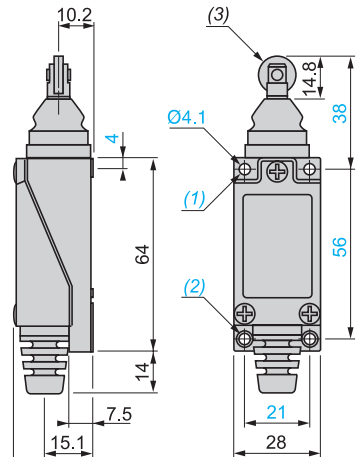
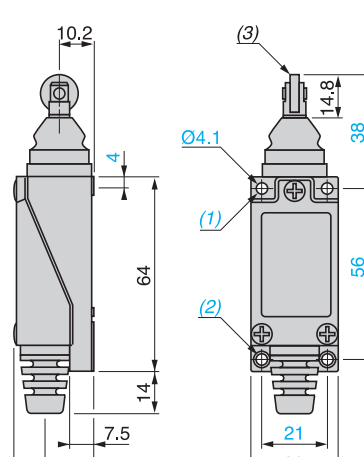
操作頭類型						
						
操作方式	塑膠滾輪型	金屬滾輪型	可調式膠滾輪	可調式金屬滾輪	可調桿式	
型號 1 NO + 1 NC (form Za)		XCE118C	XCE119C	XCE145C	XCE146C	XCE154C
重量 (kg)		0.152	0.159	0.175	0.181	0.164

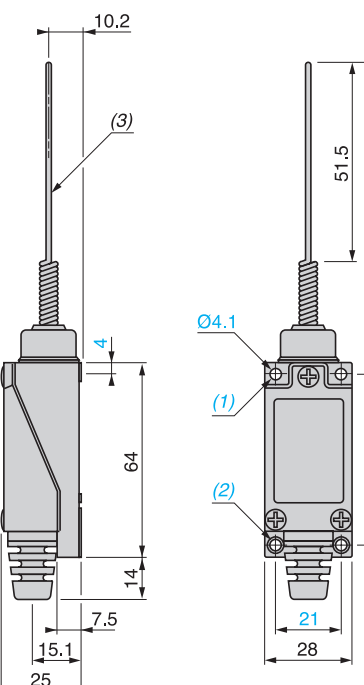
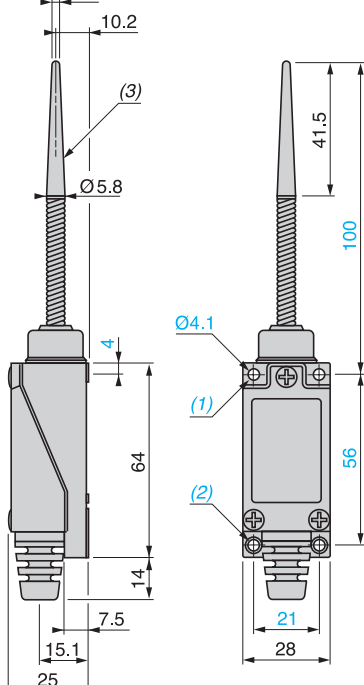
操作頭類型			
			
操作方式	全方向觸輪型	全方向彈簧桿型	
型號 1 NO + 1 NC (form Za)		XCE106C	XCE181C
重量 (kg)		0.109	0.108

限動開關
XC 系列
輕到中度負載應用， XCE

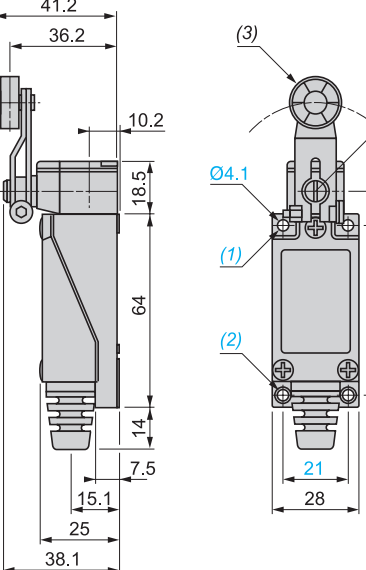
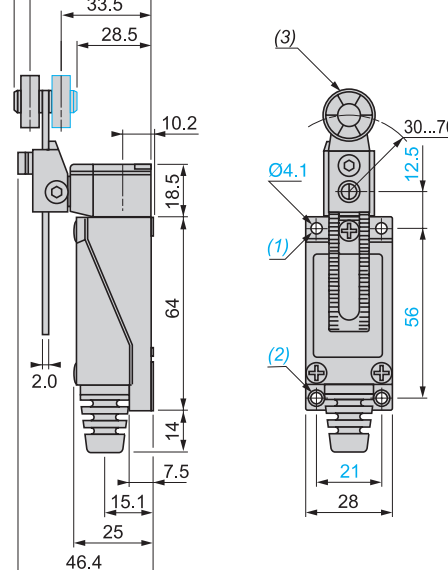
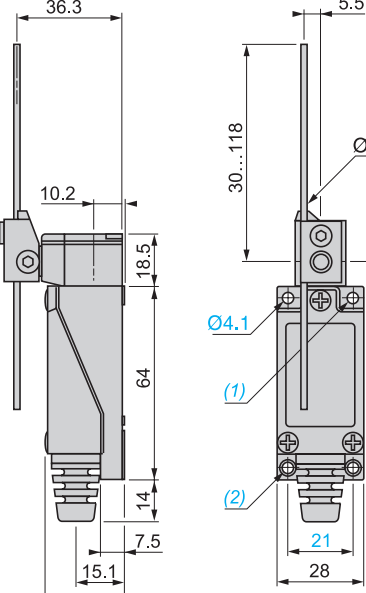
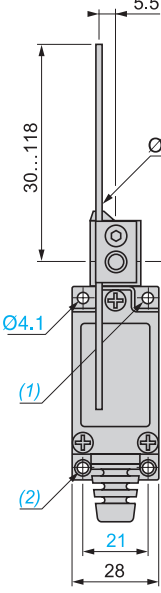
操作圖				
驅動類型				
操作圖 接觸操作 ■ 接點投入 □ 接點打開				
				
操作圖				
驅動類型				
操作圖 接觸操作 ■ 接點投入 □ 接點打開				
				
操作圖				
驅動類型				
操作圖 接觸操作 ■ 接點投入 □ 接點打開				
				

限動開關
XC 系列
輕到中度負載應用， XCE

尺寸(mm)		
XCE110C	XCE102C	XCE103C
		
(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes. (3) Stainless steel plunger Ø 7.	(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes. (3) Stainless steel roller Ø 12.5 x 3.8.	

尺寸(mm)		
XCE106C	XCE181C	
		
(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes. (3) Stainless steel wire Ø 1.2.	(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes. (3) Nylon rod.	

限動開關
XC 系列
輕到中度負載應用， XCE

尺寸(mm)	
XCE118C, XCE119C	XCE145C, XCE146C
	
(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes. (3) Nylon roller Ø 8 x 7 (roller can be rotated and locked in any position through 360°).	
XCE154C	
	
(1) 2 holes M5 tapped 7 in depth. (2) 2 M5 tapped holes.	