


### Presentation of the range

The RXM miniature relay range comprises:

- 1 5 A relay with 2 CO contacts or 3 A relays with 4 CO contacts and same dimensions
- 2 Socket with mixed contact terminals
- 3 Metal maintaining clamps (accessories)

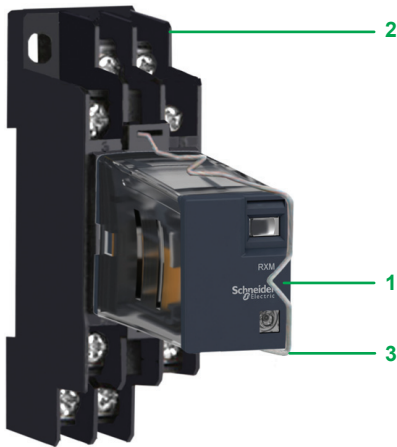


### Relay description

- 1 Area by which the product can be easily gripped
- 2 Mechanical "relay status" indicator
- 3 LED (depending on version) indicating the relay status
- 4 Four notches for rail mounting adapter or panel mounting adapter with fixing lugs
- 5 Eight or fourteen Faston type pins



### Socket description

- 1 Two fixing holes for panel mounting
- 2 Connection by screw clamp terminals
- 3 Eight or fourteen female contacts for the relay pins
- 4 Two fixing holes for metal maintaining clamp
- 5 Locating slot for mounting on DIN rail with fixing clip

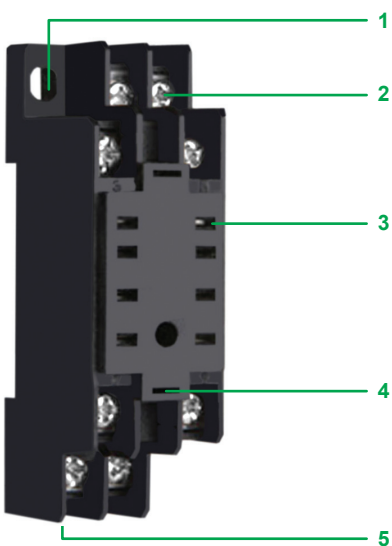

RXZE1M2C

# Zelio Relay - Electromechanical Relays


## RXM miniature relays



RXM2LB2JD




RXM2LB1JD

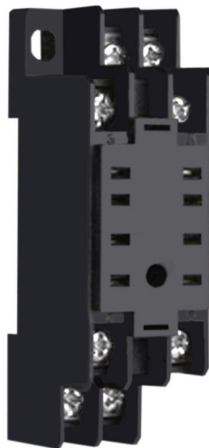


RXZE1M2C



RXZ410



RXZ420

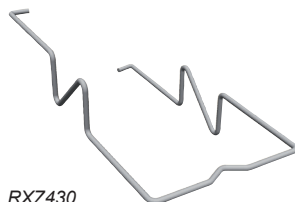

RXZ430

### References

#### Miniature relays without lockable test-button, with LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			
	2 CO - 5 A		4 CO - 3 A	
	Unit reference	Weight	Unit reference	Weight
V	kg/lb		kg/lb	
~ 12	RXM2LB2JD	0.033/ 0.073	RXM4LB2JD	0.035/ 0.077
~ 24	RXM2LB2BD	0.032/ 0.071	RXM4LB2BD	0.034/ 0.075
~ 36	RXM2LB2CD	0.034/ 0.075	RXM4LB2CD	0.036/ 0.079
~ 48	RXM2LB2ED	0.033/ 0.073	RXM4LB2ED	0.035/ 0.077
~ 110	RXM2LB2FD	0.031/ 0.068	RXM4LB2FD	0.033/ 0.073
~ 24	RXM2LB2B7	0.033/ 0.073	RXM4LB2B7	0.035/ 0.077
~ 120	RXM2LB2F7	0.032/ 0.071	RXM4LB2F7	0.033/ 0.073
~ 230	RXM2LB2P7	0.031/ 0.068	RXM4LB2P7	0.032/ 0.071

#### Miniature relays without lockable test-button, without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			
	2 CO - 5 A		4 CO - 3 A	
	Unit reference	Weight	Unit reference	Weight
V	kg/lb		kg/lb	
~ 12	RXM2LB1JD	0.032/ 0.071	RXM4LB1JD	0.034/ 0.075
~ 24	RXM2LB1BD	0.032/ 0.071	RXM4LB1BD	0.033/ 0.073
~ 48	RXM2LB1ED	0.033/ 0.073	RXM4LB1ED	0.034/ 0.075
~ 24	RXM2LB1B7	0.033/ 0.073	RXM4LB1B7	0.034/ 0.075
~ 120	RXM2LB1F7	0.031/ 0.068	RXM4LB1F7	0.033/ 0.073
~ 230	RXM2LB1P7	0.030/ 0.066	RXM4LB1P7	0.032/ 0.071

### Sockets

(sold in lots of 10)

Contact terminal arrangement	Connection	Relay type	Unit reference	Weight
Mixed	Screw clamp	RXM2	RXZE1M2C	0.034/ 0.075
	Screw clamp	RXM2 RXM4	RXZE1M4C	0.053/ 0.117

### Accessories

(sold in lots of 10)

Description	For use with	Unit reference	Weight
Metal maintaining clamp	RXZE1M●C	RXZ410	0.001/ 0.002
	RXZE1M2C	RXZ420	0.001/ 0.002
	RXZE1M4C	RXZ430	0.001/ 0.002

Note: If protection module needed, please used the RZE2● sockets with the associated protection module RXM0. You can find all the details in the RXM●AB range.